


# NUVOLA

DRAGA & AUREL



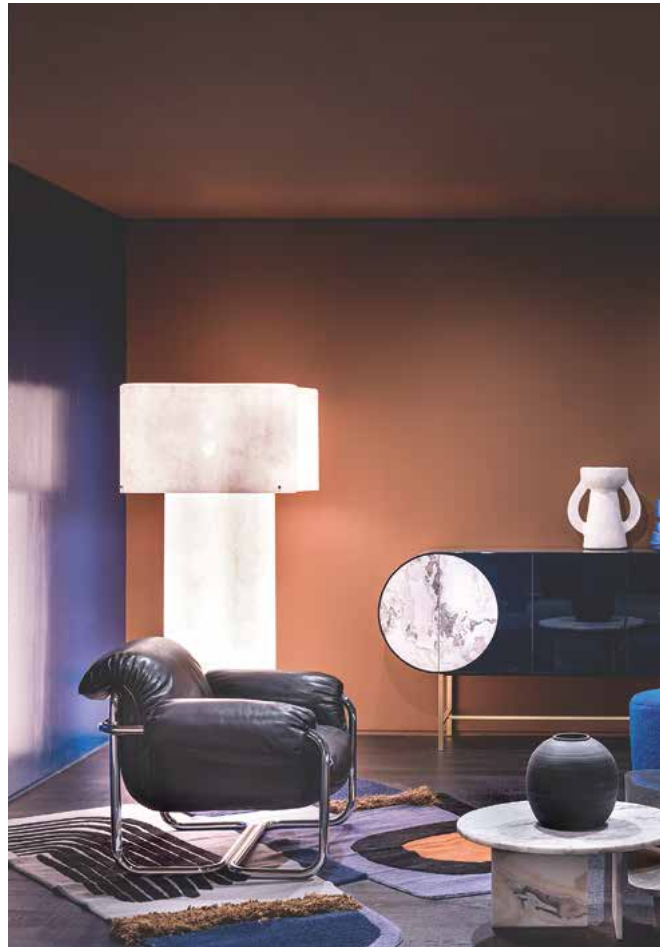

**Modello:** lampada con fonte luminosa a led. Modello che necessita di montaggio.

**Struttura:** struttura e dettagli in metallo ottonato satinato con vernice opaca. Paralume in vetroresina.

**Model:** lamp with led light source. Article with assembly required.

**Frame:** frame and details in satin brass-coated metal with matte varnish. Fiberglass lampshade.

## FINITURE DISPONIBILI/AVAILABLE FINISHES




vetroresina bianca  
white fiberglass

65 x 57 h40 cm – 25¼ x 22¼ h15½"

Sospensione. Hanging lamp.

Striscia LED 2700K – 7W/MT.  
Alimentatore 110/240 V – 24V. IP20. 1260 lumen.  
2700K LED strip – 7W/MT.  
110/240 V power supply – 24V. IP20. 1260 lumens.




Dimmerazione: **1-10** alimentatore standard già compatibile.  
Dimming: **1-10** standard power supply already compatible.

**DALI** con supplemento/**TAGLIO DI FASE** con supplemento.  
**DALI** with surcharge/**PHASE CUT** with surcharge.

70 x 51 h80 cm – 27¼ x 20 h31¼"

Sospensione. Hanging lamp.

Striscia LED 2700K – 7W/MT.  
Alimentatore 110/240 V – 24V. IP20. 2940 lumen.  
2700K LED strip – 7W/MT.  
110/240 V power supply – 24V. IP20. 2940 lumens.




Dimmerazione: **1-10** alimentatore standard già compatibile.  
Dimming: **1-10** standard power supply already compatible.

**DALI** con supplemento/**TAGLIO DI FASE** con supplemento.  
**DALI** with surcharge/**PHASE CUT** with surcharge.

65 x 57 h120 cm – 25¼ x 22¼ h46¾"

Sospensione. Hanging lamp.

Striscia LED 2700K – 7W/MT.  
Alimentatore 110/240 V – 24V. IP20. 4620 lumen.  
2700K LED strip – 7W/MT.  
110/240 V power supply – 24V. IP20. 4620 lumens.




Dimmerazione: **1-10** alimentatore standard già compatibile.  
Dimming: **1-10** standard power supply already compatible.

**DALI** con supplemento/**TAGLIO DI FASE** con supplemento.  
**DALI** with surcharge/**PHASE CUT** with surcharge.

133 x 57 h40 cm – 51¾ x 22¼ h15½"

Sospensione. Hanging lamp.

Striscia LED 2700K – 7W/MT.  
Alimentatore 110/240 V – 24V. IP20. 3780 lumen.  
2700K LED strip – 7W/MT.  
110/240 V power supply – 24V. IP20. 3780 lumens.




Dimmerazione: **1-10** alimentatore standard già compatibile.  
Dimming: **1-10** standard power supply already compatible.

**DALI** con supplemento/**TAGLIO DI FASE** con supplemento.  
**DALI** with surcharge/**PHASE CUT** with surcharge.

69 x 66 h114 cm – 27 x 25¾ h44½"

Lampada da terra. Floor lamp.

15336 lumen totali. Testa: striscia LED 2700K – 14W/MT. 11076 lumen. Corpo: striscia LED 2700K – 14W/MT. 4260 lumen.  
15336 total lumens. Head: 2700K LED strip – 14W/MT. 11076 lumens. Base: 2700K LED strip – 14W/MT. 4260 lumens.




Dimmerazione push.  
Push dimming.

89 x 96 h180 cm – 34¾ x 37½ h70¼"

Lampada da terra. Floor lamp.

19880 lumen totali. Testa: striscia LED 2700K – 14W/MT. 12780 lumen. Corpo: striscia LED 2700K – 14W/MT. 7100 lumen.  
19880 total lumens. Head: 2700K LED strip – 14W/MT. 12780 lumens. Base: 2700K LED strip – 14W/MT. 7100 lumens.

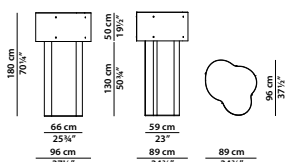

Dimmerazione push.  
Push dimming.