


HAIKU

BAXTER P.



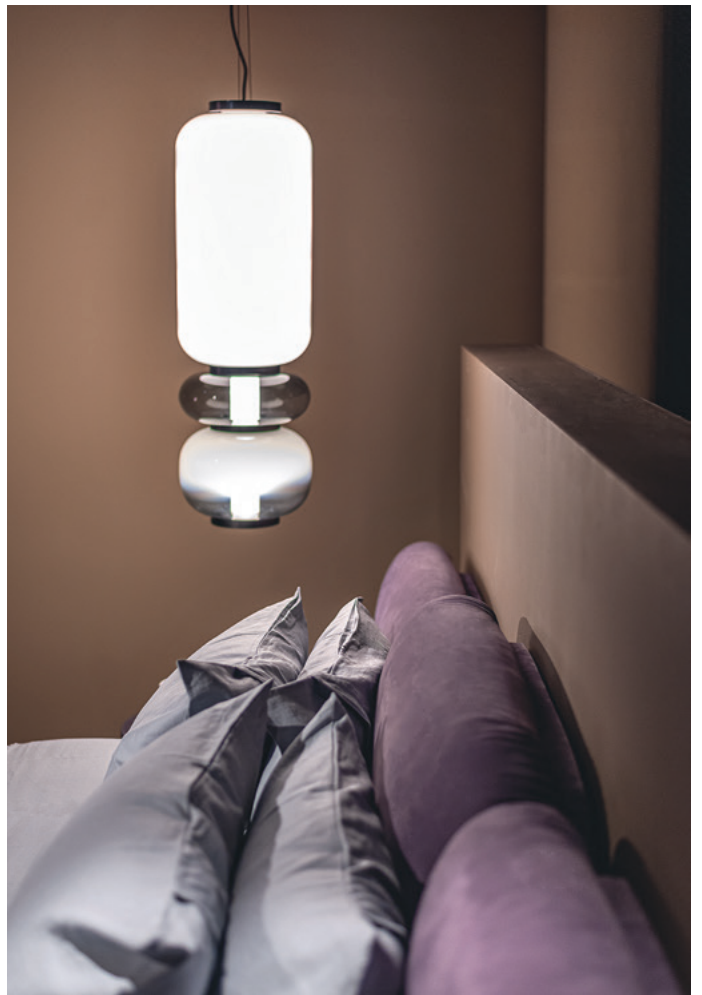

HAIKU

BAXTER P.



Modello: lampada con fonte luminosa a led. Modello che necessita di montaggio.

Struttura: basamento e dettagli in nickel spazzolato semi-opaco. Paralume in vetro soffiato trasparente temperato versione marrone o grigio.

Cassa in legno dotata di due sensori per verifica di eventuali danni durante il trasporto.
(Fare riferimento a "Avvertenze importanti").

Model: lamp with led light source. Article with assembly required.


Frame: frame, base and details in semi-matte brushed nickel. Lampshade in brown or grey tempered transparent blown glass.

Wooden crate equipped with two sensors to check for any damage during transport.
(Refer to "Important information").

Ø30 h14 cm – Ø11¾ h5½"

Applique.
Scheda LED 2700K – 16W. 1520 lumen.
220/240 V o 110 V.
Wall lamp.
2700K LED board – 16W. 1520 lumens.

Versioni:
1 – incamiciato bianco con macchia marrone.
2 – trasparente marrone con macchia bianca.
Versions:
1 – white jacketed with brown spot.
2 – brown transparent with white spot.



Dimmerazione: **TAGLIO DI FASE** standard già compatibile.
1-10 con supplemento e alimentatore remoto.
DALI con supplemento e alimentatore remoto.
Dimming: **PHASE CUT** standard already compatible.
1-10 with surcharge and remote power supply.
DALI with surcharge and remote power supply.

Ø28 h24 cm – Ø11 h9¼"

Lampada da tavolo.
Scheda LED 2700K – 16W. 1520 lumen.
220/240 V o 110 V.
Table lamp.
2700K LED board – 16W. 1520 lumens.

Versioni:
1 – trasparente marrone con 3 macchie: bianca, ametista/bianco e marrone/bianco.
Versions:
1 – brown transparent with 3 spots: white, amethyst/white and brown/white.



Dimmerazione con bottone
Dimming with button.

Ø28 h39 cm – Ø11 h15¼"

Lampada da tavolo.
Scheda LED 2700K – 16W. 1520 lumen.
220/240 V o 110 V.
Table lamp.
2700K LED board – 16W. 1520 lumens.

Versioni:
1 – trasparente marrone con 3 macchie: bianca, ametista/bianco e marrone/bianco.
Versions:
1 – brown transparent with 3 spots: white, amethyst/white and brown/white.




Dimmerazione con bottone
Dimming with button.

Ø40 h128 cm – Ø15½ h50"

Lampada da terra. Floor lamp.
Striscia LED 3000K – 19,2W/MT – alimentatore
110/240 V – 24V. Classe 1, IP20. 7500 lumen.
3000K LED strip – 19,2 W/MT – 110/240V power
supply – 24V. Class 1, IP20. 7500 lumens.

Versioni:
1 – grigio trasparente, sfumato bianco, incamiciato bianco e incamiciato bianco a fasce.
2 – marrone trasparente, sfumato bianco, incamiciato bianco and incamiciato bianco a fasce.
Versions:
1 – grey transparent, white shade, white jacketed and white jacketed with bands.
2 – brown transparent, white shade, white jacketed and white jacketed with bands.



Dimmerazione touch.
Touch dimming.

Ø30 h58 cm – Ø11¾ h22½"

Sospensione A. A hanging lamp.
Striscia LED 3000K – 19,2W/MT – alimentatore
110/240 V – 24V. Classe 1, IP20. 4350 lumen.
3000K LED strip – 19,2 W/MT – 110/240V power
supply – 24V. Class 1, IP20. 4350 lumens.

Versioni:
1 – grigio trasparente con macchie bianche.
2 – marrone trasparente con macchie bianche.
Versions:
1 – grey transparent with white spots.
2 – brown transparent with white spots.




Dimmerazione: **1-10** alimentatore standard già compatibile.
DALI alimentatore standard già compatibile.
TAGLIO DI FASE alimentatore standard già compatibile.
Dimming: **1-10** standard power supply already compatible.
DALI standard power supply already compatible.
PHASE CUT standard power supply already compatible.

Ø30 h93 cm – Ø11¾ h36¼"

Sospensione B. B hanging lamp.
Striscia LED 3000K – 19,2W/MT – alimentatore
110/240 V – 24V. Classe 1, IP20. 6550 lumen.
3000K LED strip – 19,2 W/MT – 110/240V power
supply – 24V. Class 1, IP20. 6550 lumens.

Versioni:
1 – grigio trasparente, sfumato bianco e incamiciato bianco a fasce.
2 – marrone trasparente, sfumato bianco e incamiciato bianco a fasce.
Versions:
1 – grey transparent, white shade and white jacketed with bands.
2 – brown transparent, white shade and white jacketed with bands.



Dimmerazione: **1-10** alimentatore standard già compatibile.
DALI alimentatore standard già compatibile.
TAGLIO DI FASE alimentatore standard già compatibile.
Dimming: **1-10** standard power supply already compatible.
DALI standard power supply already compatible.
PHASE CUT standard power supply already compatible.