



Legacy

Designer

Davide Nascimbeni

An exercise of subtraction and a search for atypical statements of minimalist aesthetics rethink spatial dynamics leading to Legacy. A thin, long glass tube with dimmable LED light, supported by rings of an overlying burnished brass cylindrical structure, runs with dynamic linearity through the space, tracing with a simple gesture iconic, floating sculptural configurations.

Details

- Metal pendant lights made of straight and curved glass elements.
- The glass elements are joined and held by Sand Cast Pel-tro rings. The rings are connected by a rounded metal bar.
- Pendant energy-saving LED light (Energy efficiency index A).
- Transformer integrated into the ceiling rosette.
- Alternative mounting system with a remote transformer.
- Standard total height 180 cm. (Height can be customised).

Light source

- 360° Neon LED 24 V, warm white 3000 K, CRI >90
- Upon request available with extra warm light 2700 K.
- Upon request available 110 V.
- Dimming function included.

Dimensions

- Ø100 cm
- Ø120 cm
- Ø140 cm


Notes

- Indoor use only.
- This item is carefully crafted by skilled artisans, who devote meticulous care to its creation. As a result of its handmade and hand-finished nature, variations in the marble, metal, or woodwork are to be expected and celebrated. Each item is unique and possesses its own individuality, ensuring that no two items are exactly alike.

*This light is suitable for multiple configurations.

CONSTRUCTION SPECIFICATION

Weight:	9-28.5 kg
Material:	Brass profiles with Sand-casted Peltro details, high clarity cast polymer (PMMA polymethyl-methacrylate) diffuser and Lustrò Grey glass finish
Mounting:	Ceiling
Environment:	Indoor
Finish:	Burnished Brass, Black burnished Brass, Burnished Titano




CE ENEC IP20 cULus


TECHNICAL DATA

Net Weight:	ray: 2.25 kg - straight pipe: 2.5 kg
Light source:	360° Neon LED-technology 24 V
Input Voltage [V]:	220-240 V or 110-120 V upon request
Max Power [W]:	ray: 11 W - straight pipe: 14 W
Light colour [K]:	3000 K or 2700 K upon request
Flux [lm]:	ray: 2700 K - 760 lm / 3000K - 760 lm** straight pipe: 2700 K - 979 lm / 3000 K - 979 lm**
CRI:	>90
Dimming:	Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy ray 50
Internal



Legacy ray 50
External




Legacy 100



TECHNICAL DATA

Net Weight:	9 kg
Light source:	360° Neon LED-technology 24 V
Input Voltage [V]:	220-240 V or 110-120 V upon request
Max Power [W]:	46 W
Light colour [K]:	3000 K or 2700 K upon request
Flux [lm]:	2700 K - 3069 lm / 3000 K - 3069 lm**
CRI:	>90
Dimming:	Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Circle
Ø100



TECHNICAL DATA

Net Weight:	14 kg
Light source:	360° Neon LED-technology 24 V
Input Voltage [V]:	220-240 V or 110-120 V upon request
Max Power [W]:	72 W
Light colour [K]:	3000 K or 2700 K upon request
Flux [lm]:	2700 K - 4998 lm / 3000 K - 4998 lm**
CRI:	>90
Dimming:	Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Oval
50+100+50



TECHNICAL DATA

Net Weight:	28.5 kg
Light source:	360° Neon LED-technology 24 V
Input Voltage [V]:	220-240 V or 110-120 V upon request
Max Power [W]:	150 W
Light colour [K]:	3000 K or 2700 K upon request
Flux [lm]:	2700 K - 10434 lm / 3000 K - 10434 lm**
CRI:	>90
Dimming:	Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Circuit
422x214

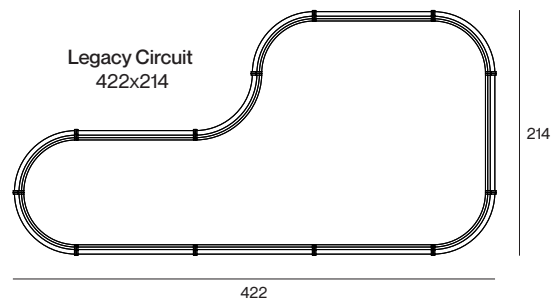

**Output of led inside the lamp. Losses due to diffusor and reflectors are not considered. Values are indicative, ambient temperature, height and position of the lamp may vary the values.

CONSTRUCTION SPECIFICATION

Weight: 10-32.7 kg
Material: Brass profiles with Sand-casted Peltro details, high clarity cast polymer (PMMA polymethyl-methacrylate) diffuser and Lustró Grey glass finish
Mounting: Ceiling
Environment: Indoor
Finish: Burnished Brass, Black burnished Brass, Burnished Titanio




CE ENEC IP20 cULus


TECHNICAL DATA

Net Weight: ray: 2.50 kg - straight pipe: 2.95 kg
Light source: 360° Neon LED-technology 24 V
Input Voltage [V]: 220-240 V or 110-120 V upon request
Max Power [W]: ray: 13 W - straight pipe: 17 W
Light colour [K]: 3000 K or 2700 K upon request
Flux [lm]: ray: 2700 K - 912 lm / 3000 K - 912 lm**
 straight pipe: 2700 K - 1169 lm / 3000 K - 1169 lm**
CRI: >90
Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy ray 60
Internal



Legacy ray 60
External




Legacy 120



TECHNICAL DATA

Net Weight: 10 kg
Light source: 360° Neon LED-technology 24 V
Input Voltage [V]: 220-240 V or 110-120 V upon request
Max Power [W]: 55 W
Light colour [K]: 3000 K or 2700 K upon request
Flux [lm]: 2700 K - 3646 lm / 3000 K - 3646 lm**
CRI: >90
Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Circle
Ø120



TECHNICAL DATA

Net Weight: 15.9 kg
Light source: 360° Neon LED-technology 24 V
Input Voltage [V]: 220-240 V or 110-120 V upon request
Max Power [W]: 86 W
Light colour [K]: 3000 K or 2700 K upon request
Flux [lm]: 2700 K - 5986 lm / 3000 K - 5986 lm**
CRI: >90
Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Oval
60+120+60



TECHNICAL DATA

Net Weight: 32.7 kg
Light source: strip LED 24 V
Input Voltage [V]: 220-240 V or 110-120 V upon request
Max Power [W]: 180 W
Light colour [K]: 3000 K or 2700 K upon request
Flux [lm]: 2700 K - 12486 lm / 3000 K - 12486 lm**
CRI: >90
Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Circuit
502x254

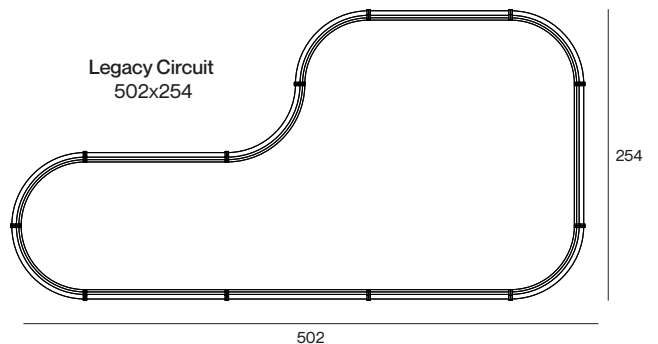

**Output of led inside the lamp. Losses due to diffuser and reflectors are not considered. Values are indicative, ambient temperature, height and position of the lamp may vary the values.

CONSTRUCTION SPECIFICATION

Weight: 11.2-37.2 kg
 Material: Brass profiles with Sand-casted Peltro details, high clarity cast polymer (PMMA polymethyl-methacrylate) diffuser and Lustró Grey glass finish
 Mounting: Ceiling
 Environment: Indoor
 Finish: Burnished Brass, Black burnished Brass, Burnished Titanio




CE ENEC IP20 cULus


TECHNICAL DATA

Net Weight: ray: 2.8 kg - straight pipe: 3.4 kg
 Light source: 360° Neon LED-technology 24 V
 Input Voltage [V]: 220-240 V or 110-120 V upon request
 Max Power [W]: ray: 16 W - straight pipe: 20 W
 Light colour [K]: 3000 K or 2700 K upon request
 Flux [lm]: ray: 2700 K - 1064 lm / 3000 K - 1064 lm**
 straight pipe: 2700 K - 1359 lm / 3000 K - 1359 lm**
 CRI: >90
 Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable

Legacy ray 70
Internal



Legacy ray 70
External




Legacy 140



TECHNICAL DATA

Net Weight: 11.2 kg
 Light source: 360° Neon LED-technology 24 V
 Input Voltage [V]: 220-240 V or 110-120 V upon request
 Max Power [W]: 64 W
 Light colour [K]: 3000 K or 2700 K upon request
 Flux [lm]: 2700 K - 4243 lm / 3000 K - 4243 lm**
 CRI: >90
 Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable


Legacy Circle
Ø140



TECHNICAL DATA

Net Weight: 18 kg
 Light source: 360° Neon LED-technology 24 V
 Input Voltage [V]: 220-240 V or 110-120 V upon request
 Max Power [W]: 104 W
 Light colour [K]: 3000 K or 2700 K upon request
 Flux [lm]: 2700 K - 6974 lm / 3000 K - 6974 lm**
 CRI: >90
 Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable

Legacy Oval
70+140+70

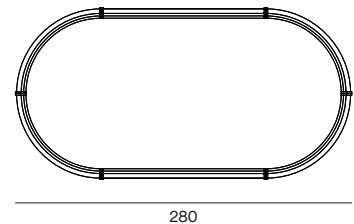


280

TECHNICAL DATA

Net Weight: 37.2 kg
 Light source: 360° Neon LED-technology 24 V
 Input Voltage [V]: 220-240 V or 110-120 V upon request
 Max Power [W]: 215 W
 Light colour [K]: 3000 K or 2700 K upon request
 Flux [lm]: 2700 K - 14538 lm / 3000 K - 14538 lm**
 CRI: >90
 Dimming: Push / Phase cut / 0-10 V / 1-10 V / DMX / DALI-2 dimmable

Legacy Circuit
582x249

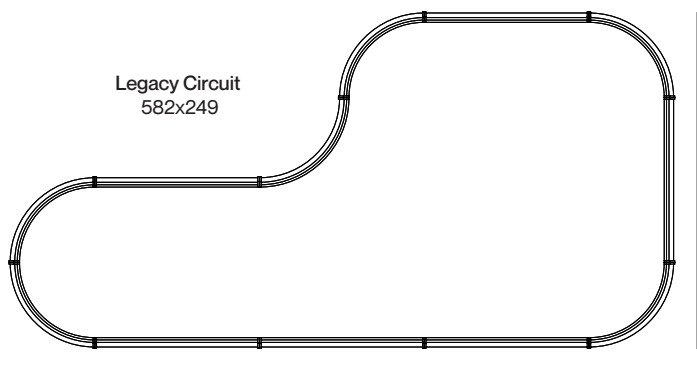

582

249

**Output of led inside the lamp. Losses due to diffuser and reflectors are not considered. Values are indicative, ambient temperature, height and position of the lamp may vary the values.

CARE AND MAINTENANCE OF LEATHER

For this upholstery, Henge uses fine leathers that have undergone processes that do not alter the original appearance and unique character of the leather. Marks, veins and differences in the grain, thickness and colour are a guarantee of the authenticity and natural quality of the hide. For everyday cleaning, simply wipe the surface with a clean, dry, non-abrasive, preferably white cloth. Dry dirt can be easily removed with the use of a soft bristle brush. You can also use a medium power vacuum cleaner with a suitable attachment, and avoid rubbing the surface with it. Any stains caused from water soluble substances (soft drinks, coffee, tea, milk, chocolate, oil, grease, make-up) should be removed quickly by gently dabbing the surface with a dry cloth or paper towel. Next you will need to lightly rub the stain from the outside towards the center using a clean cloth soaked in a neutral pH, colourless detergent diluted in water. Try not to soak the leather, which must be dried quickly with a clean cloth. Do not use a hairdryer and avoid exposing to direct sunlight. Greasy substances (oil, ketchup, mayonnaise, chocolate) can instead be carefully removed with a paper towel without pressing on the surface, so as to prevent the stain from being absorbed by the leather. Gently rub the stain from the outside towards the center using a clean cloth soaked in a neutral pH, colourless detergent, well diluted in water. Without soaking the leather, dry immediately with a clean, dry cloth.

CAUTION

Do not place leather furniture or sofas near any source of heat such as fireplaces, stoves or radiators. The minimum distance must be 50cm. The upholstery will maintain its original colour by avoiding placing the sofa in direct sunlight or near artificial light sources, especially halogen lights. In fact both artificial light and sunlight can permanently damage leather upholstery, as can unsuitable detergents. Natural leather upholstery makes each sofa a unique piece because every hide is one of a kind. Specific Nabuk cleaner and care kit, including specific products and accessories is available upon request.

CARE AND MAINTENANCE OF MARBLE

Marble is crystalline limestone rock composed primarily of calcium carbonate. As a natural material, colour variations, whether overall or in the veins and marks even within the same slab, are considered characteristic. The product may change by itself, acquiring an appearance that makes it all the more prized and unique the more it shows signs of age. Over time, such surfaces may deteriorate and/or mark (marks bring more noticeable with a pale colour). It is therefore advisable to avoid leaving cleaning products or household liquids (oil, red wine, vinegar, etc.) on the surface. In particular, products that contain citric acid (present for example in fruit, citrus fruit and tomatoes) act on contact with the treated surface, removing its original sheen. Always clean stains on surfaces while they are still fresh. To reduce risk, we treat the marble according to the most advanced waterproofing technology. Yet even the best waterproofing treatment, such as the one we apply, becomes less effective normally after two or three months, depending on your use of the surface. Therefore it is very important to renew the treatment regularly using the recommended product supplied. To apply this, carefully follow the instructions printed on the package, bearing in mind however, that the treatment does not make the surface immune to the effects of acidic substances (such as lemon juice). For routine maintenance use a microfiber cloth with a neutral pH detergent (water alone is enough for flamed finishes). Do not use products containing acids or limescale removing substances. Specific cleaner and care kit for our stones, including specific products and accessories is available upon request.

CARE AND MAINTENANCE OF WOOD

The woods used for our products are of the highest quality and manufactured with the greatest craftsmanship. As wood is a natural material, when placed in a very dry environment it loses humidity and consequently shrinks. In contrast, in a very humid environment wood acquires humidity, increasing in size. These subtle reactions are not flaws but natural movements of a 'living' product, which expands and contracts as the seasons change. Furthermore, the final moisture content of wood also varies according to use, for which particular care is required. For routine maintenance of wood, use a soft, damp, fluffy cloth, or a microfiber cloth. Stubborn stains cleaning wood and does not scratch. To thoroughly clean even the finest grain, follow the direction of the grain using a neutral pH detergent. Next, rinse with a well wrung out cloth and thoroughly dry all surfaces. It is advisable to use neutral pH products and to always test any product on a small hidden part of the object before using it on the outside. To apply the rejuvenating oil provided, carefully follow the instructions printed on the packaging. Bear in mind, however, that the treatment does not make the surface immune to the effects of acidic substances (such as lemon juice). Specific cleaner and care kit for wooden surfaces, including specific products and accessories is available upon request.

CARE AND MAINTENANCE OF STEEL MESH TWEED PATTERN

Avoid leaving household liquids (oil, red wine, vinegar, etc.) on the surface. In particular, products that contain citric acid (present for example in fruit, citrus fruit and tomatoes) act on contact with the treated surface, removing its original sheen. Always clean stains on surfaces while they are still fresh. For routine maintenance use a microfiber cloth with a neutral pH detergent for glass (alcohol free). Do not use products containing acids or limescale removing substances.

CARE AND MAINTENANCE OF BRASS AND IRON

Avoid leaving household liquids (oil, red wine, vinegar, etc.) on the surface. In particular, products that contain citric acid (present for example in fruit, citrus fruit and tomatoes) act on contact with the treated surface, removing its original sheen. Always clean stains while they are still fresh. For routine maintenance use a microfiber cloth and water. Do not use products containing acids, limescale removing substances or alcohol.